


# ES70 Lift & Slide Window System



A high-end thermo-insulating system, suitable for door height windows with exceptional requirements for functionality and aesthetics.

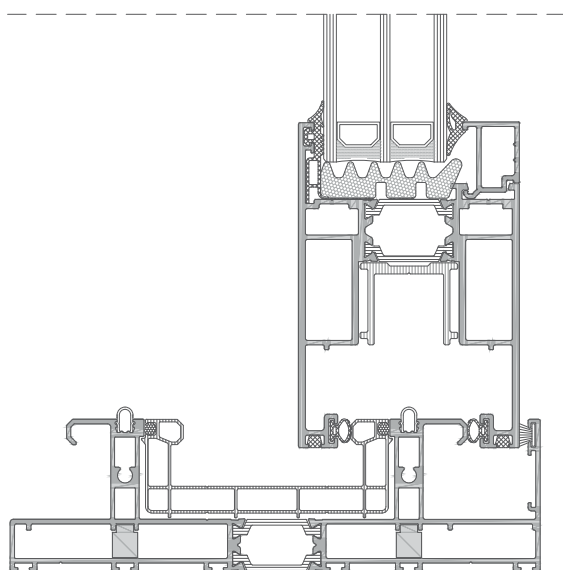

## Technical features

- Elegant straight design
- Flat bottom frame option with only 25 mm height
- Narrow interlock option
- Double & triple glazing option
- Glazing infill range: 25 ÷ 52 mm

## Hardware accessories


- Lift & Slide mechanism
- On demand: Max. sash width / height up to 3300 mm / 3300 mm
- Max. sash weight: 300 kg
- On demand: up to 440 kg

## Performance

|                                  |                          |
|----------------------------------|--------------------------|
| Air Permeability:                | <b>Class 4</b>           |
| Watertightness:                  | <b>E750</b>              |
| Resistance to Wind Load:         | <b>C5</b>                |
| Thermal transmittance ( $U_f$ ): | from <b>2,73 W/(m²K)</b> |

## Typologies

- Single, double, triple & multiple track Lift & Slide
- Combination with fixed light (Hotel type)
- Flat rails solution with only 25mm height
- Integration of fly screens

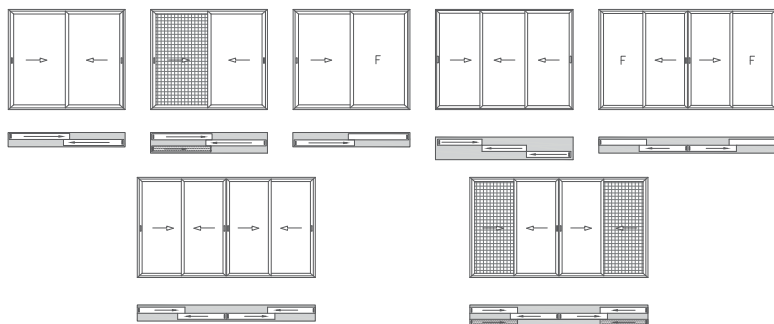

## Surface treatment options

- RAL colours
- ETEM colours
- Anodizing
- Wood effects

Quality Standards:

- QUALICOAT
- QUALANOD
- QUALIDECO

## Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

