


ES70 Sliding System

A heavy duty sliding window system with thermal break, developed to support solutions to extremely thick glazing, heavy weights or large openings, ensuring unique operation. It provides flat rail option, narrow interlock option and integration with flyscreen.

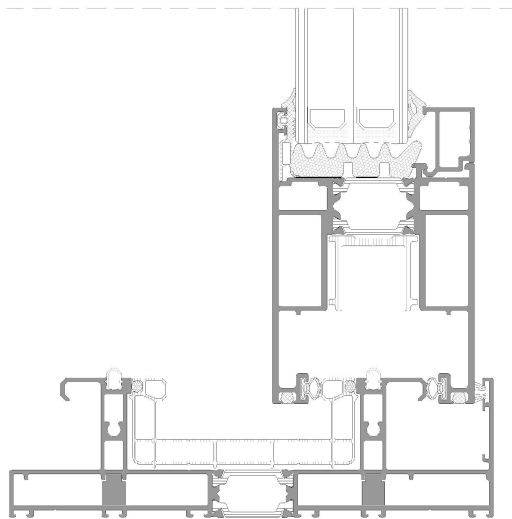

Technical features

Sash width: 70mm

Sash height: 103mm

Rail height: 25mm / 48mm

Interlock width: 54mm / 113mm

Glazing infill: 25 ÷ 52 mm

Max. sash height: 3.300mm

Max. sash width: 3.300mm

Performance

Air Permeability: up to **Class 4**

Watertightness: up to class **E750**

Resistance to wind load: up to class **C5**

Thermal transmittance (U_f): from **1,7 W/(m²K)**

Acoustic performance: up to **45 dB**

Hardware

Lift & slide mechanism

Max. sash weight: 440kg

Single or multiple point lock

Surface treatment

QUALICOAT – Powder coating


QUALANOD - Anodising

QUALIDECO – Wood effects

Typologies

- Double, triple & quadruple sash sliding with or without flyscreen
- Single sash sliding with fixed light (Hotel Type)

- Quadruple sash sliding - corner

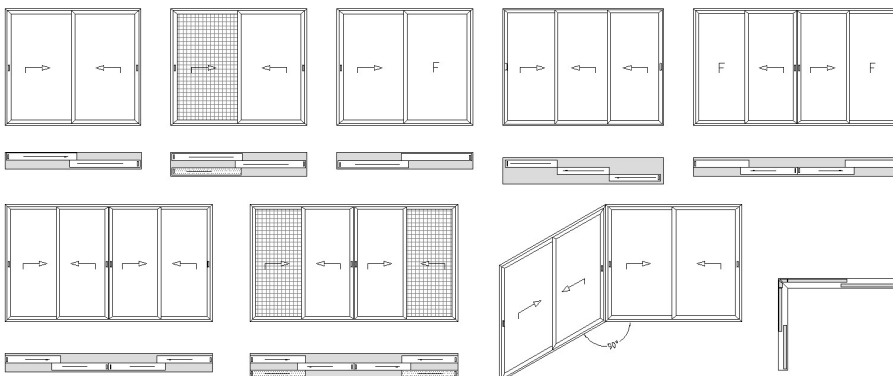

Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

ETEM